



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

Signed

Dated 31 October 2003

**THIS PAGE BLANK (USPTO)**

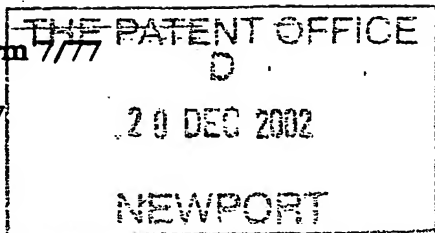

# Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

DY3059

2. Patent application number

(if you know it)

0229680.4

3. Full name of the or of each applicant

ROLLS-ROYCE PLC

4. Title of the invention

BLADE ARRANGEMENT FOR GAS TURBINE ENGINE

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent

BY VIRTUE OF SECTION 39(1) (a) OF THE PATENTS ACT 1977

6. How many, if any, additional Patents Forms 7/77 are attached to this form?

3

(see note (c))

7.

I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

Signature

Date

M A GUNN

19.12.2002

8. Name and daytime telephone number of person to contact in the United Kingdom

K A WHITE

01332 249452

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

MARTYN RICHARDS  
15 WENTWORTH DRIVE  
STRETTON  
BURTON ON TRENT  
DE13 0YJ

Patents ADP number (if you know it):

08094088001

KENNETH FRANKLIN UDALL  
24 RIDGEWAY DRIVE  
KIRK HALLAM  
ILKESTON  
DERBYSHIRE  
DE7 4JP

Patents ADP number (if you know it):

08531568001


ANDREW SWIFT  
PLOT 1  
STUBWOOD LANE  
STUBWOOD  
DENSTONE  
STAFFORDSHIRE  
ST14 5HU

Patents ADP number (if you know it):

08531576001

Reminder

Have you signed the form?

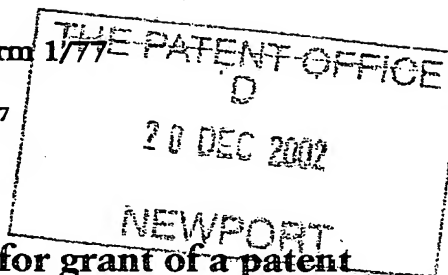

23DEC02 E772569-1 D00370  
 P01/7700 0.00-0229680.4

The Patent Office

Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

DY3059

2. Patent application number

(The Patent Office will fill in this p

0229680.4

20 DEC 2002

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

ROLLS-ROYCE PLC  
 65 BUCKINGHAM GATE  
 LONDON  
 SW1E 6AT

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

ENGLAND

3940002

4. Title of the invention

BLADE ARRANGEMENT FOR GAS TURBINE ENGINE

5. Name of your agent (*if you have one*)

M A GUNN

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

ROLLS-ROYCE plc  
 PATENTS DEPARTMENT  
 PO BOX 31  
 DERBY  
 DE24 8BJ

Patents ADP number (*if you know it*)

3962002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
 (*if you know it*)

Date of filing  
 (*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
 (*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

11

Claim(s)

3

Abstract

1

Drawing(s)

7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

4

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

1

Any other documents (please specify)

DEPOSIT ACCOUNT FEE SHEET

11.

I/We request the grant of a patent on the basis of this application.

Signature

M A GUNN

Date

19.12.2002

12. Name and daytime telephone number of person to contact in the United Kingdom

K A WHITE

01332 249452

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Blade Arrangement for Gas Turbine Engine

The invention relates to a blade arrangement for a gas turbine engine, particularly but not exclusively for a low pressure compressor or fan.

5 A blade arrangement for a gas turbine engine fan includes a plurality of fan blades mounted for rotation on a fan disc so as to extend radially outwardly from the disc. Each blade is mounted on the disc via a root portion of the blade which fits into a complementary slot in the  
10 disc. The root portion may for example be "dovetail" shaped. The blade arrangement is conventionally contained within a fan case, a small clearance being provided between radially outer tips of the blades and the fan case.

If a single fan blade of the blade arrangement becomes  
15 detached from the disc, this produces a very large forward axial force on the adjacent blade. Large forward axial forces are also imposed on the other remaining blades because the loss of a single blade results in distortion or ovality of the fan case. The more the casing distorts, the  
20 heavier the contact between the casing inner surface and the remaining blade tips, leading to increased forward force on each remaining blade as it rotates past the distortions in the casing. There is consequently a requirement to restrain to remaining blades in the axial  
25 direction, to prevent further blade loss.

Conventionally, axial restraint has been provided by a thrust ring. This consists of a generally annular member which is attached to the disc and which includes an abutment portion located axially forwards of the blades.  
30 When an axially forward force is exerted on a blade, the blade abuts against the thrust ring and is retained in place on the disc.

As engines have increased in size, the magnitudes of the forces exerted on the blades in the event of a single  
35 blade being lost have increased. A larger, heavier blade can cause increased distortion of the fan case leading to

increased forward forces on the remaining blades as they rotate past the distortions in the casing. There is thus a desire to provide an improved thrust ring.

According to the invention there is provided a blade arrangement for a gas turbine engine, the blade arrangement comprising:

a plurality of blades mounted for rotation on a disc so as to extend radially outwardly therefrom; and

a retention member, the retention member including an attachment portion which is attached to the disc and an abutment portion for resisting forward axial movement of at least one of the blades relative to the disc;

the blade arrangement further comprising restraint means spaced from the attachment portion of the retention member, for substantially preventing radially outward movement of the abutment portion of the retention member when a forward axial force is applied by the blade to the abutment portion.

Where the term "forward" is used throughout this specification it refers to a direction towards the front of the engine in normal use.

The blade arrangement may form part of a low pressure compressor or fan.

Preferably the retention member is shaped such that the abutment portion contacts part of the blade when a forward axial force is applied to the blade, to resist forward axial movement of the blade.

Preferably the geometry of the blade arrangement is such that when the blade applies a forward axial force to the abutment portion of the retention member, a vector representing the resultant force applied to the retention member passes substantially through the attachment portion of the retention member.

Preferably the restraint means includes a part of the retention member which is shaped such that its radial movement is substantially prevented by an adjacent part of

the blade or the disc. Where a part of the blade or disc is referred to this is intended to include any additional member attached to the blade or disc. The said part of the retention member may comprise a restraint member extending  
5 from a remainder of the retention member in an axially rearwards direction. Preferably the adjacent part of the blade or disc is located radially outwardly of the restraint member. A small radial gap may be provided between the restraint member and the adjacent part of the  
10 blade or disc. Preferably this gap is between up to 5mm in width.

The attachment portion of the retention member is preferably located axially forwardly of the abutment portion and of the restraint means. The attachment portion  
15 is preferably attached to the disc by attachment means. The disc may also include an attachment portion, to which the retention member is attached. The attachment means preferably includes a bolt arrangement, the bolt extending in the axial direction, and passing through both respective  
20 attachment portions of the retention member and the disc.

Preferably the retention member includes an arm portion which extends between the attachment portion and the restraint member. Preferably the arm portion is angled at between  $10^\circ$  and  $80^\circ$  to the axial direction of the blade  
25 arrangement. The arm portion may be angled at between  $20^\circ$  and  $50^\circ$  to the axial direction.

Preferably the arm portion is substantially frustoconical in shape.

The restraint member may be substantially cylindrical  
30 in shape. Preferably the cylinder is generally co-axial with the disc. The adjacent part of the fan blade or disc may comprise a substantially cylindrical member provided on the blade, located radially outwardly of and adjacent to the restraint member, to substantially prevent radially  
35 outward movement of the restraint member.

Alternatively the restraint member may comprise an

elongate finger, located between the disc and the blade. Preferably the finger extends rearwardly from a remainder of the retention member, in the axial direction. Preferably the retention member includes a plurality of  
5 elongate fingers each located between a blade and the disc. Preferably an elongate finger is located between each blade and the disc.

According to the invention there is further provided a gas turbine engine including a blade arrangement according  
10 to any of the preceding definitions. The blade arrangement may form part of a low pressure compressor or fan of the gas turbine engine.

Embodiments of the invention will be described for the purpose of illustration only, with reference to the  
15 accompanying drawings, in which:-

Fig. 1 is a diagrammatic sectional view showing the general arrangement of a known gas turbine engine.

Fig. 2 is a diagrammatic perspective view of part of a known blade arrangement for a gas turbine engine fan,  
20 showing a lost blade;

Fig. 3 is a diagrammatic sectional view of part of a blade arrangement incorporating a known thrust ring;

Fig. 4 is a diagrammatic sectional view of part of a blade arrangement according to a first embodiment of the  
25 invention;

Fig. 5 is a diagrammatic sectional view of part of a blade arrangement according to a second embodiment of the invention;

Fig. 6 is a diagrammatic sectional view of part of a  
30 blade arrangement according to a third embodiment of the invention; and

Fig. 7 is a diagrammatic sectional view of part of a blade arrangement according to a fourth embodiment of the invention.

35 With reference to Fig. 1 a ducted fan gas turbine engine generally indicated at 10 comprises, in axial flow

series, an air intake 12, a propulsive fan 14, an intermediate pressure compressor 16, a high pressure compressor 18, combustion equipment 20, a high pressure turbine 22, an intermediate pressure turbine 24, a low pressure turbine 26 and an exhaust nozzle 28.

The gas turbine engine 10 works in the conventional manner so that air entering the intake 12 is accelerated by the fan 14 to produce two air flows, a first air flow into the intermediate pressure compressor 16 and a second airflow of "bypass air" which provides propulsive thrust. The intermediate pressure compressor 16 compresses the air flow directed into it before delivering the air to the high pressure compressor 18 where further compression takes place.

The compressed air exhausted from the high pressure compressor 18 is directed into the combustion equipment 20 where it is mixed with fuel and the mixture combusted. The resultant hot combustion products then expand through and thereby drive the high, intermediate and low pressure turbines 22, 24 and 26 before being exhausted through the nozzle 28 to provide additional propulsive thrust. The high, intermediate and low pressure turbines 22, 24 and 26 respectively drive the high and intermediate pressure compressors 16 and 18 and the fan 14 by suitable interconnecting shafts.

Fig. 2 illustrates in more detail a part of a blade arrangement in the form of a fan 14 for the gas turbine engine 10. The fan 14 includes a plurality of fan blades 30 extending radially outwardly from a disc 32. Each blade 30 includes a dovetail root portion 34 fitting into a complementary slot 36 in the disc 32. A fan case 38 (see Fig. 1) surrounds the blades 30, a small clearance being provided between radially outer tips of the blades 30 and the fan case 38.

Referring again to Fig. 2, a single fan blade 30a has been lost from the disc 32, along a release plane 39. The

released blade 30a initially impacts an adjacent trailing blade 30b at an impact point 40, exerting a substantial forward axial force on that blade. A forward axial force is also exerted on the remaining blades by the distortion  
 5 of the fan case 38, as explained previously.

Referring to Fig. 3, it is known to use a thrust ring 42 to provide axial restraint for the blades 30, when a single blade is released. Fig. 3 shows a blade 30 mounted on a disc 32, an annulus filler 44 also being visible. The  
 10 annulus filler 44 fits between adjacent blades and provides a smooth surface for airflow between the blades.

The thrust ring 42 is generally annular in overall shape and includes a ring shaped attachment portion 46, which is attached by means of axially extending bolts 48 to  
 15 an adjacent ring shaped attachment portion 50 of the disc 32.

The thrust ring further includes an abutment portion 52 which is located axially forwardly of a stop lug 54 attached to the blade root portion 34. The abutment  
 20 portion 52 thereby restrains axially forward movement of the blade 30.

Referring to Fig. 4, there is illustrated in section a part of an improved blade arrangement in the form of a fan  
 14.

25 The fan 14 includes a plurality of fan blades 30 (only one of which is visible in Fig. 4) mounted on a disc 32, as previously described. The fan arrangement further includes a retention member in the form of a thrust ring 42.

The thrust ring 42 is generally annular, being shown  
 30 in section in Fig. 4, and includes an attachment portion 46 which is generally ring shaped. The attachment portion 46 forms a radially inner part of the thrust ring 42, and is located at its axially forward end. The attachment portion 46 is affixed to a generally ring shaped attachment portion  
 35 50 of the disc 32, by attachment means in the form of bolts 48, just one of which is visible and indicated

schematically in Fig. 4. The bolts 48 extend axially through the attachment portions 46 and 50 and hold the thrust ring 42 to the disc 32, preventing relative axial movement therebetween. An attachment point 56 is defined  
5 where the bolts 48 intersect the plane where the attachment portions 46 and 50 meet.

The thrust ring 42 further includes an arm portion 58 which slopes backwardly from the attachment portion 46 and which is generally frustoconical in shape (and therefore  
10 straight and sloping in section as illustrated in Fig. 2). The arm portion 58 in this embodiment slopes at an angle of about  $55^\circ$  to the axial direction.

At its axially forward and radially inner end, the arm portion 58 includes an undercut shoulder 59, which is  
15 generally L-shaped in section, and of complementary shape to a right angled radially outer corner 61 of the attachment portion 61.

At an axially rearward and radially outward end of the arm portion 58, the thrust ring 42 includes restraint means  
20 in the form of a restraint member 60. The restraint member 60 is generally cylindrical in shape, extending backwards from the arm portion 58 in the axial direction.

The thrust ring 42 further includes an abutment portion 52 which extends radially outwardly from the arm  
25 portion 58. The abutment portion 52 is generally ring shaped, and is located rearwardly of the attachment portion 46, and hence of the attachment point 56.

The blade 30 is formed with a post member 62 which in normal operation touches or nearly touches the restraint  
30 member 60 and the abutment portion 52 of the thrust ring 42. The post member 62 extends in the axially forward direction from the remainder of the blade 30 and lies radially outwardly of the abutment portion 52 of the thrust ring 42. Although just one post member 62 is illustrated  
35 in Fig. 4, each fan blade 30 would include a post member.

The thrust ring 42 functions as follows. If a blade is lost from the disc 32 a large rearward force is exerted on the remainder of the blades, including the blade 30 illustrated in Fig. 4. The initial force is in the direction of the arrow X. This force causes the post member 62 to abut against the abutment portion 52 of the thrust ring 42. Because the thrust ring 42 is affixed to the disc 32 via the bolts 48, at the point of attachment 56, the axially directed force causes a bending moment about the bolts 48. The applicant has appreciated that in prior art designs of thrust ring this force results in a rolling moment which causes a slight radially outward movement of the abutment portion 52 of the thrust ring. This causes the generally frustoconical shape of the thrust ring 42 to open out slightly causing bending about the bolts 48 and possible weakening of the bolts 48.

In the thrust ring 42 of Fig. 4, any radially outward movement of the abutment portion 52 is prevented by the engagement of the restraint member 60 against the post member 62 on the blade 30. Because the point of attachment 56 and the bolts 48 are located forwardly of the abutment portion 52, the angle of the arm portion 58 relative to the axial direction cannot increase without the restraint member 60 moving radially outwardly, this being prevented by the post member 62.

The geometry of the restraint member 60, abutment portion 52 and the post member 62 on the blade 30 is such that when the blade 30 exerts an axially forward force on the restraint member 60 and the abutment portion 52, a vector representing the resultant force applied to the thrust ring extends in the direction of the arrow Y, i.e. down the arm portion 58 of the thrust ring 42, via the shoulder 59 generally through the bolts 48, and preferably substantially through the point of attachment 56. There is therefore substantially no bending moment about the point of attachment 56. The bolts 48 are strong under direct

non-bending forces and the performance of the bolts 48 is therefore improved. The above effect is caused by the triangulation of the thrust ring geometry which, under forward thrust loading, produces a resultant force vector  
5 extending generally through the point of attachment 56.

Referring to Fig. 5, there is illustrated an alternative embodiment of the invention, in which corresponding parts are indicated with the same reference numerals as in Fig. 4. The thrust ring 42 of the Fig. 5  
10 embodiment is of generally similar shape to that of the Fig. 4 embodiment, including an attachment portion 46 which is affixed via bolts 48 to an attachment portion 50 of the disc 32. The thrust ring 42 further includes a sloping arm portion 58 (having an undercut L-shaped shoulder portion  
15 59) and a restraint member 60, as in the previous embodiment. In the Fig. 5 embodiment however, the arm portion 58 is shorter and the restraint member 60 locates in an undercut portion 64 of the disc 32. The undercut portion 64 defines a shoulder 66 of the disc, the shoulder  
20 66 being generally annular and adjacent to and radially outwards of the restraint member 60.

The thrust ring 42 further includes an abutment portion 52 which is generally ring shaped and which extends radially outwardly from a remainder of the thrust ring 42.  
25 As in the previous embodiment, the abutment portion 52 is located axially forwardly of a part of the blade 30 and resists forward axial movement of the blade.

The embodiment of Fig. 5 works in a similar way to that described with reference to the Fig. 4 embodiment,  
30 except that the restraint member 60 is prevented from radially outward movement by the shoulder 66 of the disc 32 rather than by the post member 62 of the blade 30.

Referring to Fig. 6, there is illustrated an alternative embodiment of the invention, in which  
35 corresponding reference numerals are again used. The thrust ring 42 of Fig. 6 is generally similar to that of

Fig. 4 except that the restraint member 60 is replaced by a plurality of restraint means in the form of restraint fingers 68. The fingers 18 are elongate and extend axially backwards from the remainder of the thrust ring 42. A  
5 restraint finger 68 is located between the disc 32 and a restraining base part 69 of each individual fan blade 30 and functions in a similar manner to the restraint member 60 of the previous embodiments.

Fig. 7 (which shows just part of the retention member  
10 42) illustrates a variation of the Fig. 6 embodiment. The restraint fingers 68 are smaller and fit between a chuck 70 and the blade 30. Dowels 72 are provided to prevent relative axial movement of the blade 30 and the chuck 70.

There are thus provided various embodiments of a blade  
15 arrangement wherein axial forces on the thrust ring 42 are resolved into forces which are directed generally through the point of attachment 56 of the thrust ring 42 to the disc 32. This triangulation of the thrust ring geometry produces direct loads on the attachment bolts 48 and avoids  
20 rolling moments which tends to overload the bolts.

Various modifications may be made to the above described embodiment without departing from the scope of the invention. For example, a small clearance may be provided between the restraint member 60 of the thrust ring  
25 42 and the part of the blade 30 or disc 32 against which it abuts, this allowing some deflection to absorb shock loading. The precise geometry may be varied and the section lengths, thicknesses and angles may be optimised by use of computer optimisation techniques. In the described  
30 embodiments the restraint member/restraint fingers abut against a part of the blade 30 or disc 32. They could of course abut against a further part attached to the blade or disc.

Whilst endeavouring in the foregoing specification to  
35 draw attention to those features of the invention believed to be of particular importance it should be understood that

the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

**CLAIMS**

1. A blade arrangement (14) for a gas turbine engine  
5 (10), the blade arrangement (14) comprising:

a plurality of blades (30) mounted for rotation on a  
disc (32) so as to extend radially outwardly therefrom; and

a retention member (42) , the retention member  
including an attachment portion (46) which is attached to  
10 the disc (32) and an abutment portion (52) for resisting  
forward axial movement of at least one of the blades (30)  
relative to the disc (32) ;

characterised in that the blade arrangement (14)  
further comprises restraint means (60, 68) spaced from the  
15 attachment portion (46) of the retention member (42), for  
substantially preventing radially outward movement of the  
abutment portion (52) of the retention member (42) when a  
forward axial force is applied by the blade (30) to the  
abutment portion (52).

20 2. A blade arrangement (14) according to claim 1, the  
blade arrangement (14) forming part of a low pressure  
compressor or fan.

3. A blade arrangement (14) according to claim 1 or claim  
2 wherein the retention member (42) is shaped such that the  
25 abutment portion (52) contacts part of the blade (30) when  
a forward axial force is applied to the blade (30), to  
resist forward axial movement of the blade.

4. A blade arrangement (14) according to claim 3 wherein  
the geometry of the blade arrangement (14) is such that  
30 when the blade (30) applies a forward axial force to the  
abutment portion (52) of the retention member (42), a  
vector representing the resultant force applied to the  
retention member (42) passes substantially through the  
attachment portion (46) of the retention member.

35 5. A blade arrangement (14) according to claim 4 wherein  
the restraint means includes a part (60, 68) of the

retention member (42) which is shaped such that its radial movement is substantially prevented by an adjacent part (62, 66, 69) of the blade or the disc.

6. A blade arrangement (14) according to claim 5 wherein the said part of the retention member comprises a restraint member (60, 68) extending from a remainder of the retention member in an axially rearwards direction, the adjacent part of the blade or disc being located radially outwardly of the restraint member.

10 7. A blade arrangement according to claim 6 wherein the abutment portion and the restraint member together comprise a portion of the restraint member which is generally L-shaped in section.

8. A blade arrangement (14) according to claim 6 or claim 15 7 wherein the attachment portion (46) of the retention member (42) is located axially forwardly of the abutment portion (52) and of the restraint means (60, 68).

9. A blade arrangement (14) according to claim 8 wherein the disc (32) also includes an attachment portion (50), to 20 which the retention member is attached, via a bolt arrangement (48), the bolt extending in the axial direction, and passing through both respective attachment portions of the retention member (42) and the disc (32).

10. A blade arrangement (14) according to claim 9 wherein 25 the retention member (42) includes an arm portion (58) which extends between the attachment portion (46) and the restraint member (60, 68), the arm portion (58) being angled at between 40° and 70° to the axial direction of the blade arrangement (14).

30 11. A blade arrangement (14) according to claim 10 wherein the arm portion includes an undercut shoulder (59), which is generally L-shaped in section, and of complementary shaped to a radially outer corner of the attachment portion (50).

35 12. A blade arrangement (14) according to claim 10 or claim 11 wherein the arm portion (58) is substantially

frustoconical in shape.

13. A blade arrangement (14) according to any of claims 1 to 12 wherein the restraint member (60) is substantially cylindrical in shape, and the adjacent part of the fan blade or disc comprises a substantially cylindrical member, located radially outwardly of and adjacent to the restraint member, to substantially prevent radially outward movement of the restraint member (60).

14. A blade arrangement (14) according to any of claims 1 to 12 wherein the restraint member comprises an elongate finger (68), located between the disc (32) and the blade (30), the finger (68) extending rearwardly from a remainder of the retention member (42), in the axial direction.

15. A blade arrangement (14) according to claim 14 wherein the retention member (42) includes a plurality of elongate fingers (68) each located between a blade (30) and the disc (32), an elongate finger (68) being located between each blade and the disc.

16. A blade arrangement (14) substantially as herein described with reference to Figs. 4, 5, 6 or 7 of the drawings.

17. A gas turbine engine including a low pressure compressor or fan including a blade arrangement according to any of the preceding claims.

18. Any novel subject matter or combination including novel subject matter disclosed herein, whether or not within the scope of or relating to the same invention as any of the preceding claims.

ABSTRACTFIG. 4

5

BLADE ARRANGEMENT FOR GAS TURBINE ENGINE

A blade arrangement (14) for a gas turbine engine (10) includes a plurality of blades (30) mounted for rotation on  
10 a disc (32) so as to extend radially therefrom and a retention member (42), the retention member including an attachment portion (46) which is attached to the disc (32) and an abutment portion (52) for resisting forward axial movement of at least one of the blades (30) relative to the  
15 disc (32). The blade arrangement (14) further comprises restraint means (60, 68) spaced from the attachment portion (46) of the retention member (42), for substantially preventing radially outward movement of the abutment portion (52) of the retention member (42) when a forward  
20 axial force is applied by the blade (30) to the abutment portion (52).

**THIS PAGE BLANK (USPTO)**

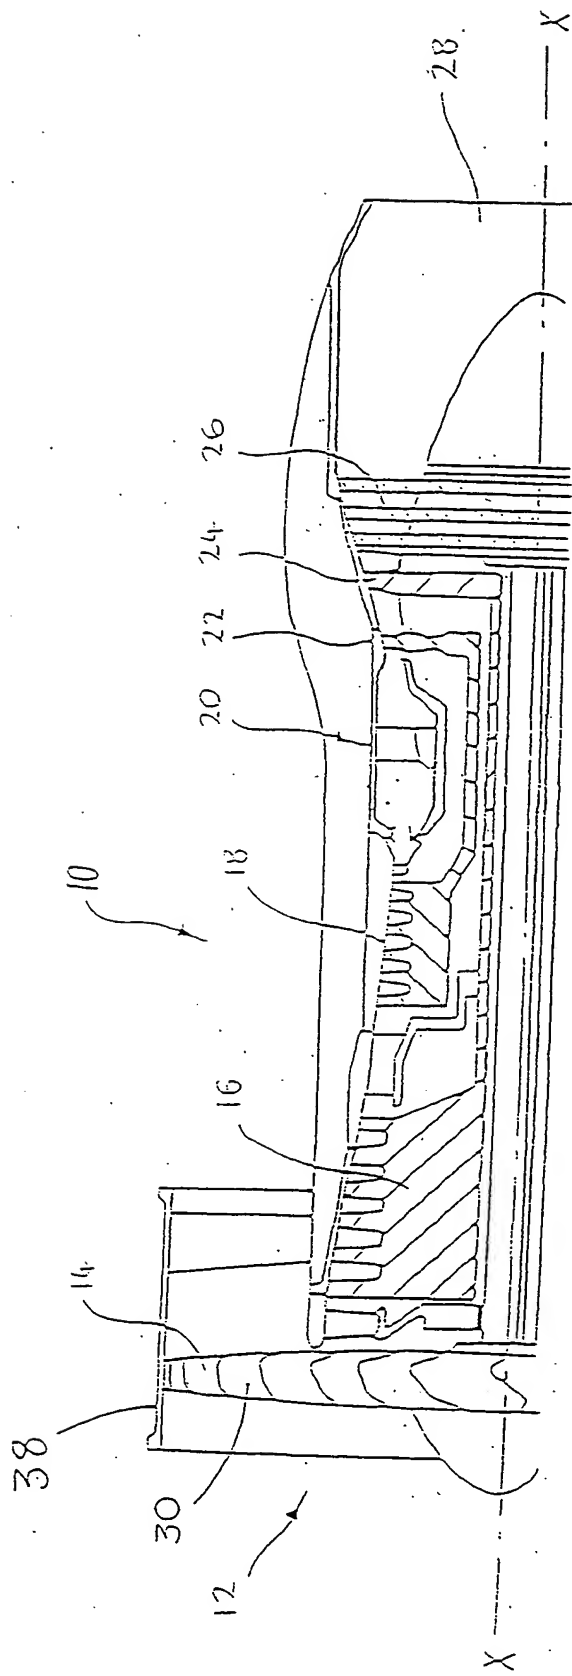


FIG. 1

**THIS PAGE BLANK (USPTO)**

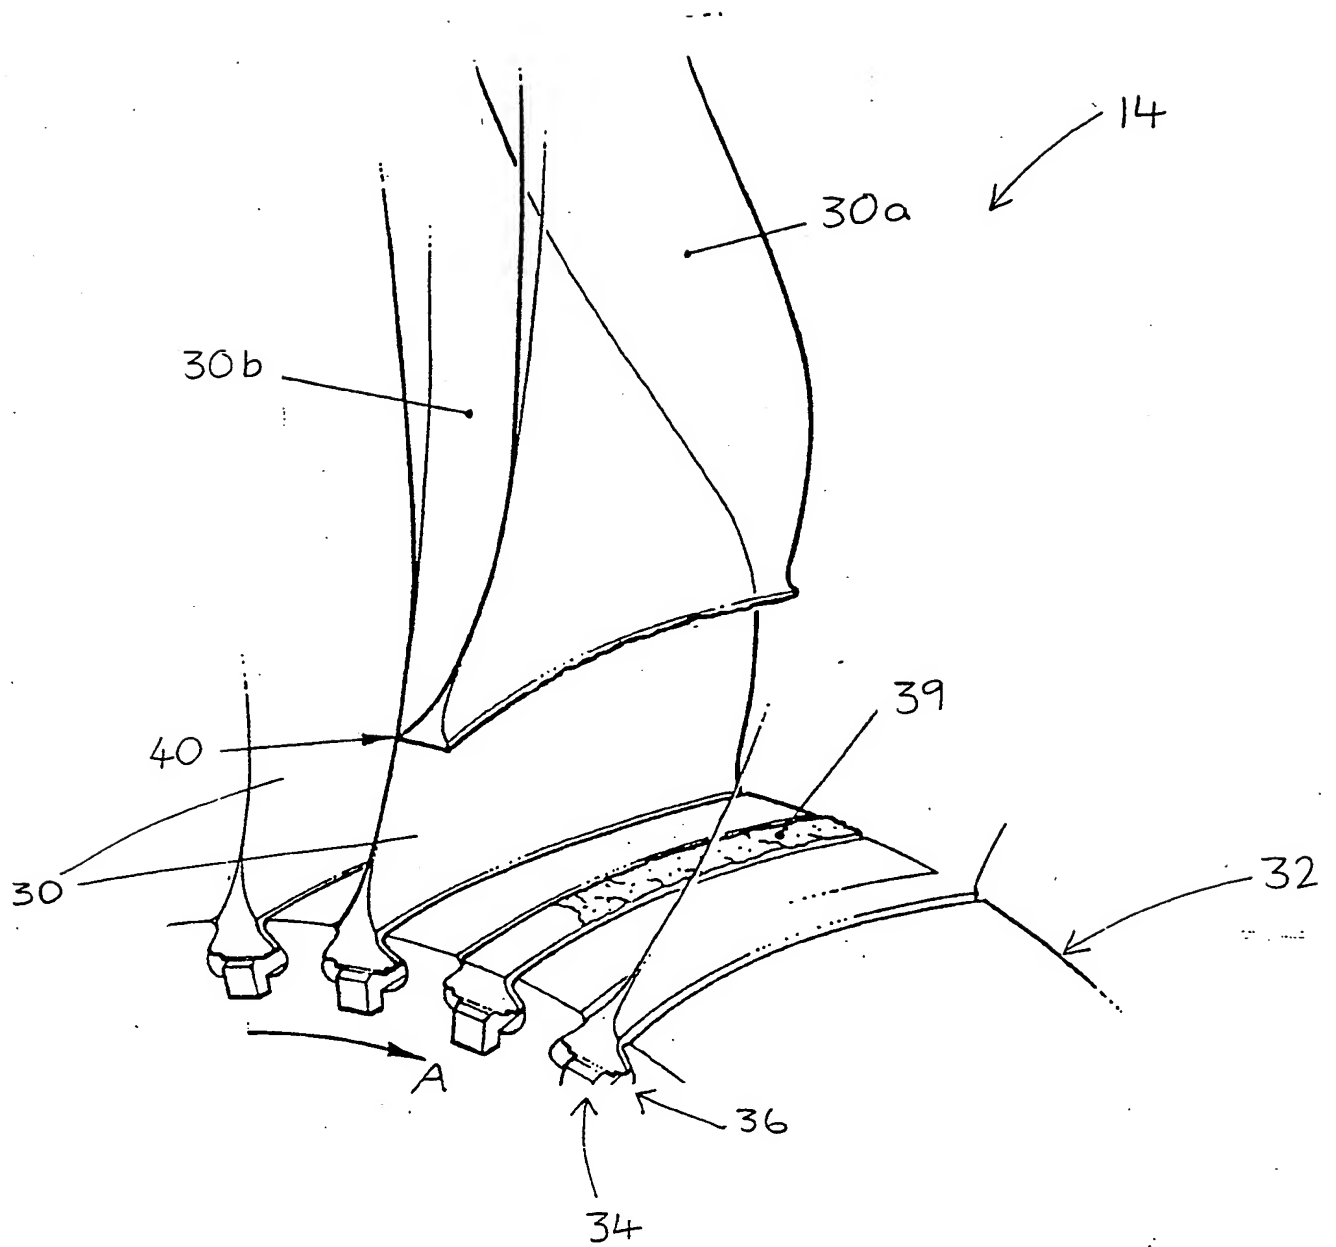


FIG 2

**THIS PAGE BLANK (USPTO)**

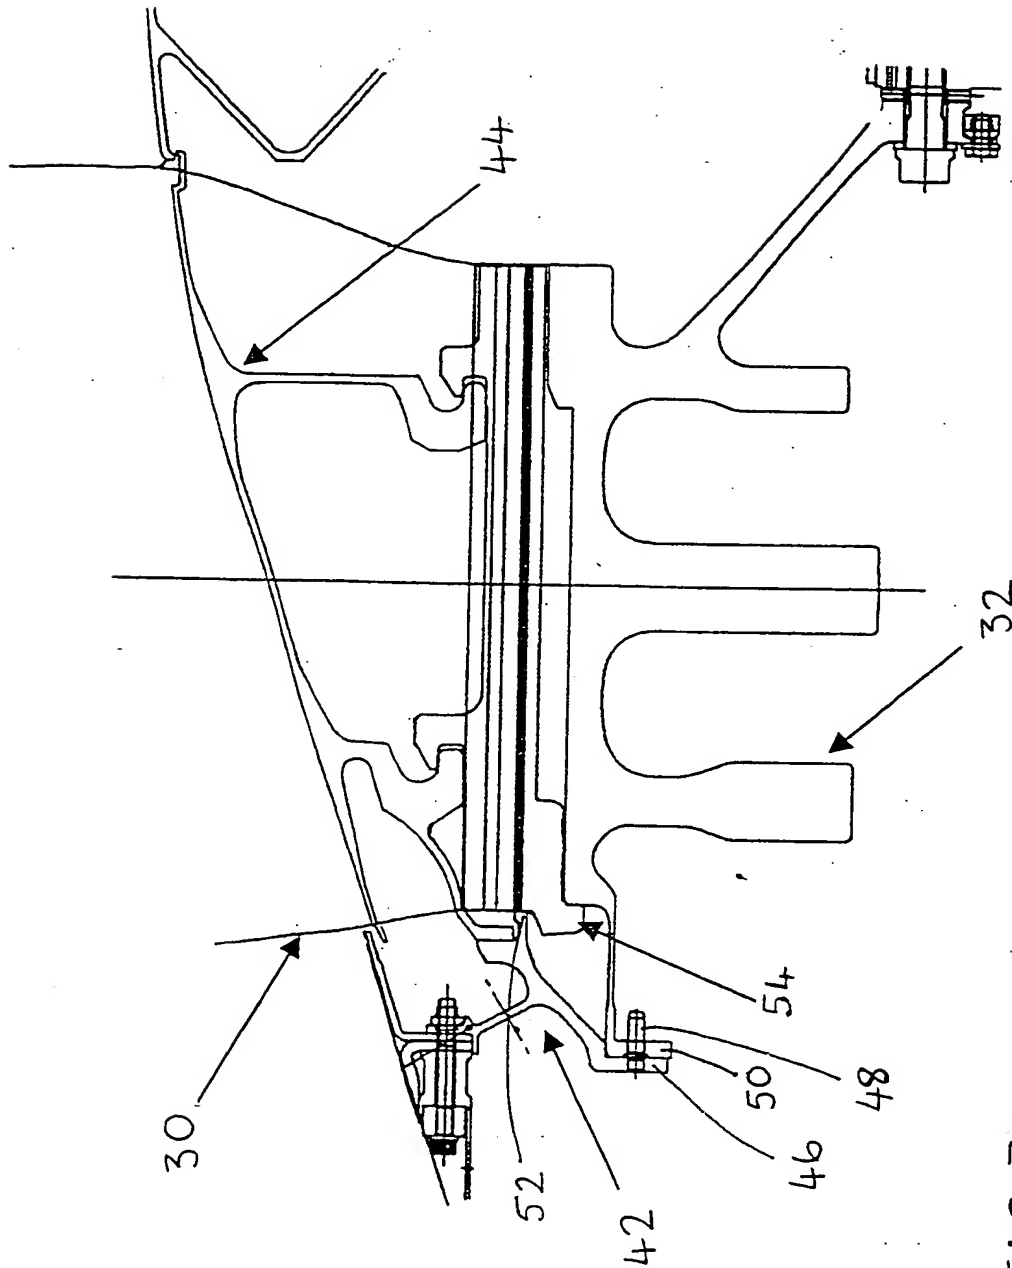


FIG 3

**THIS PAGE BLANK (USPTO,**

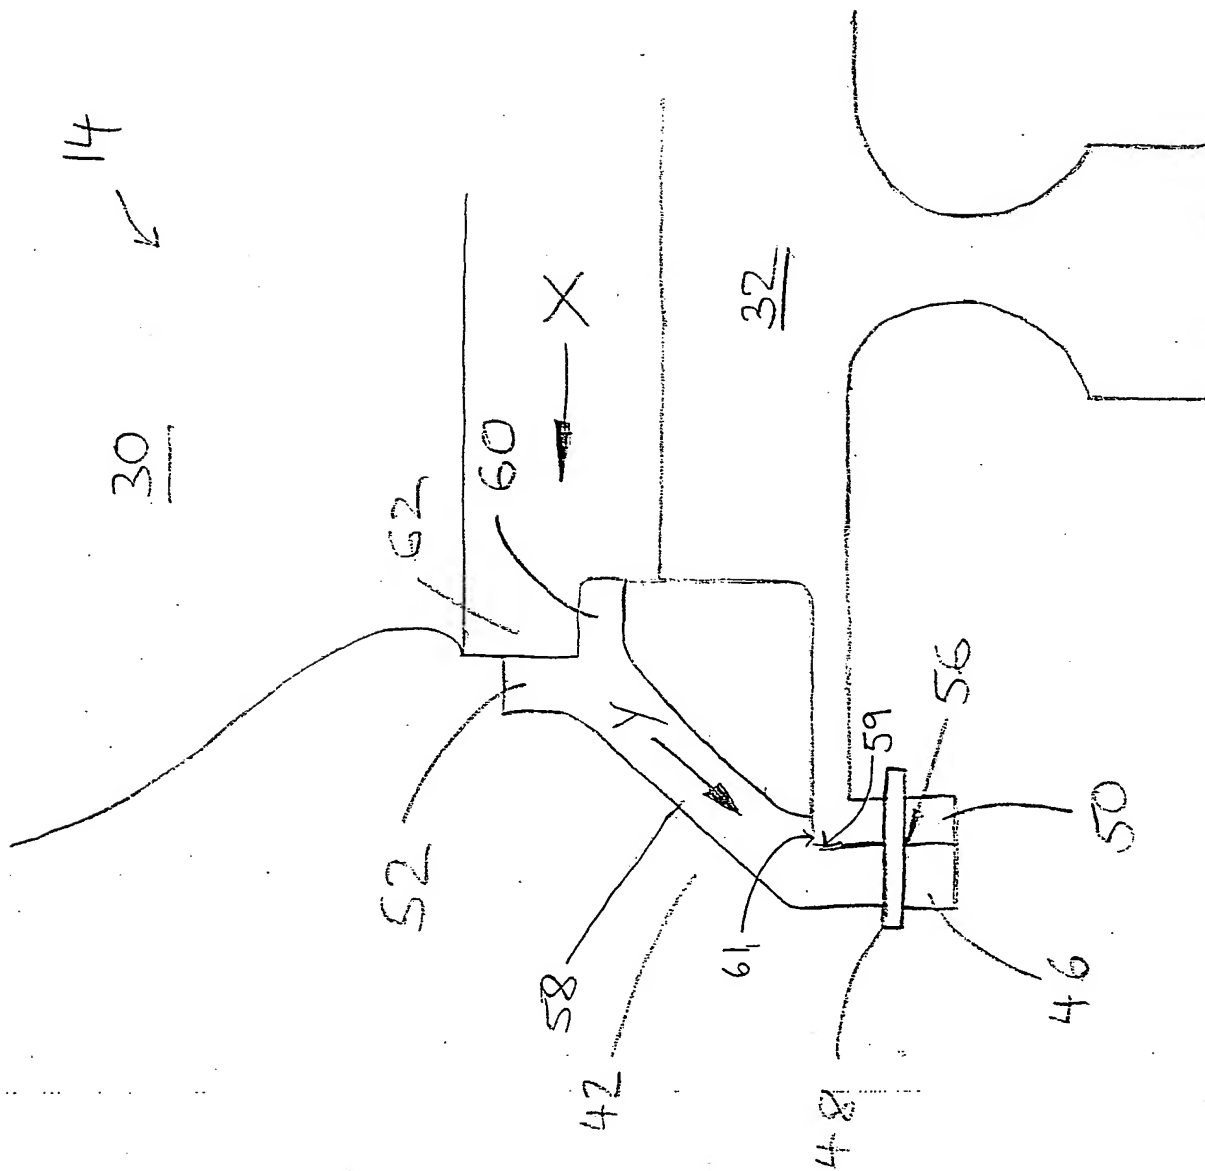


FIG 4

**THIS PAGE BLANK (USPTO)**

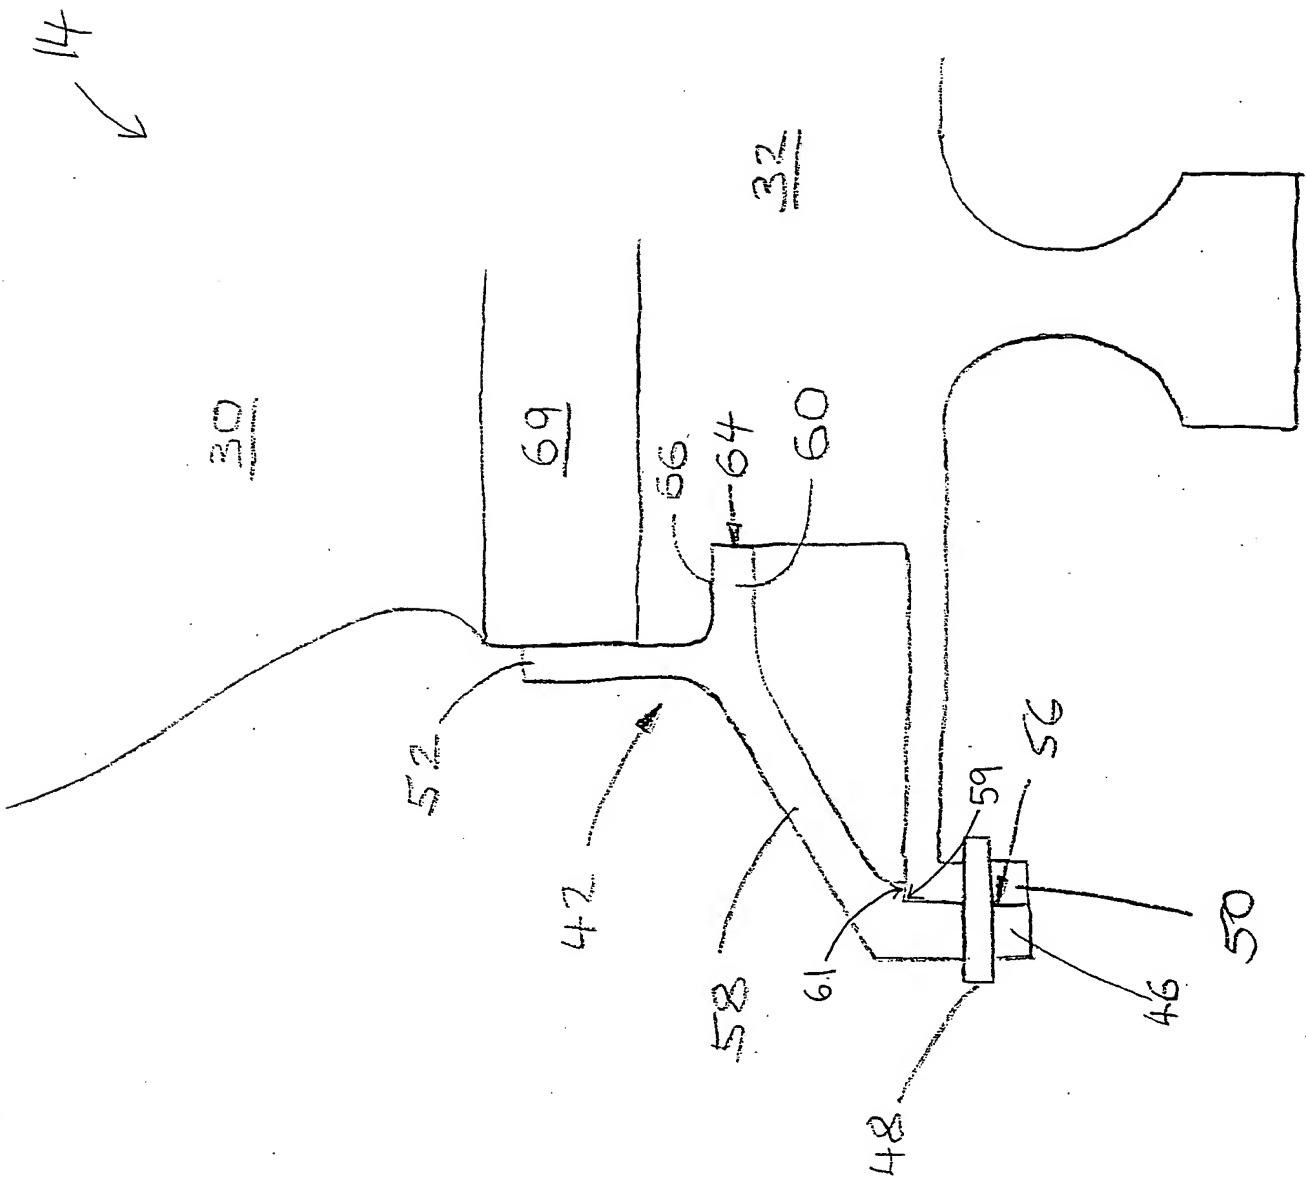


FIG 5



**THIS PAGE BLANK (USPRO)**


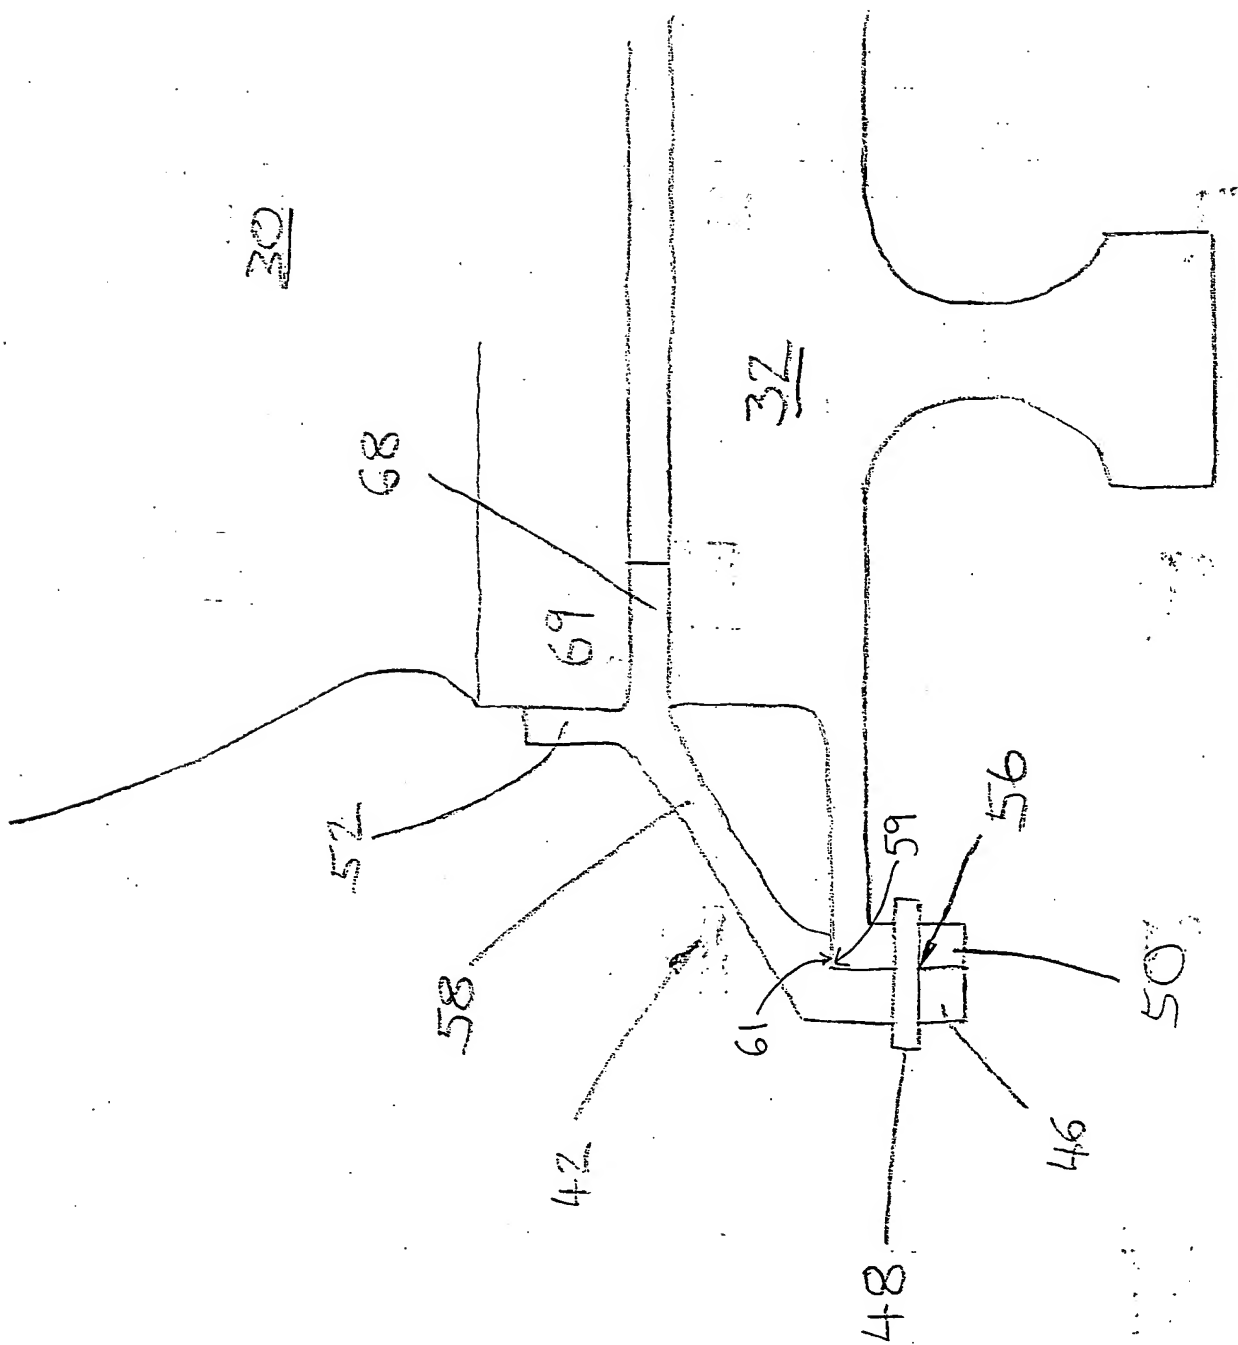


FIG 6

**THIS PAGE BLANK (USPTO)**

FIG 7

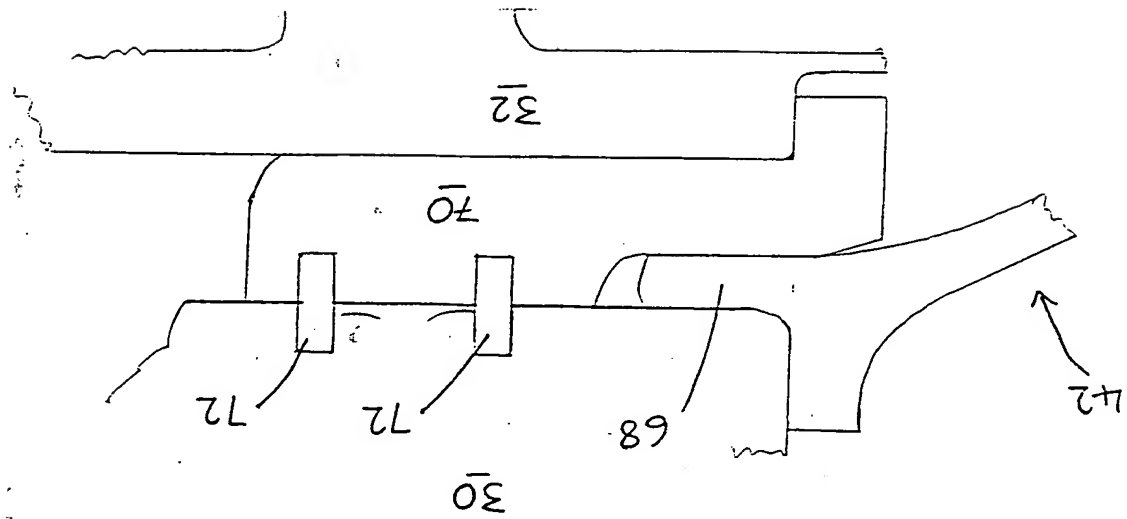

THIS PAGE BLANK (USPTO)